





Driver: _____	Airtemp: _____	Size: <input type="checkbox"/> Open <input type="checkbox"/> Med. <input type="checkbox"/> Tight
Date: . . .	Humidity: _____	Traction: <input type="checkbox"/> High <input type="checkbox"/> Med. <input type="checkbox"/> Low
Track: _____	Track temp: _____	Surface: <input type="checkbox"/> Smooth <input type="checkbox"/> Med. <input type="checkbox"/> Bumpy

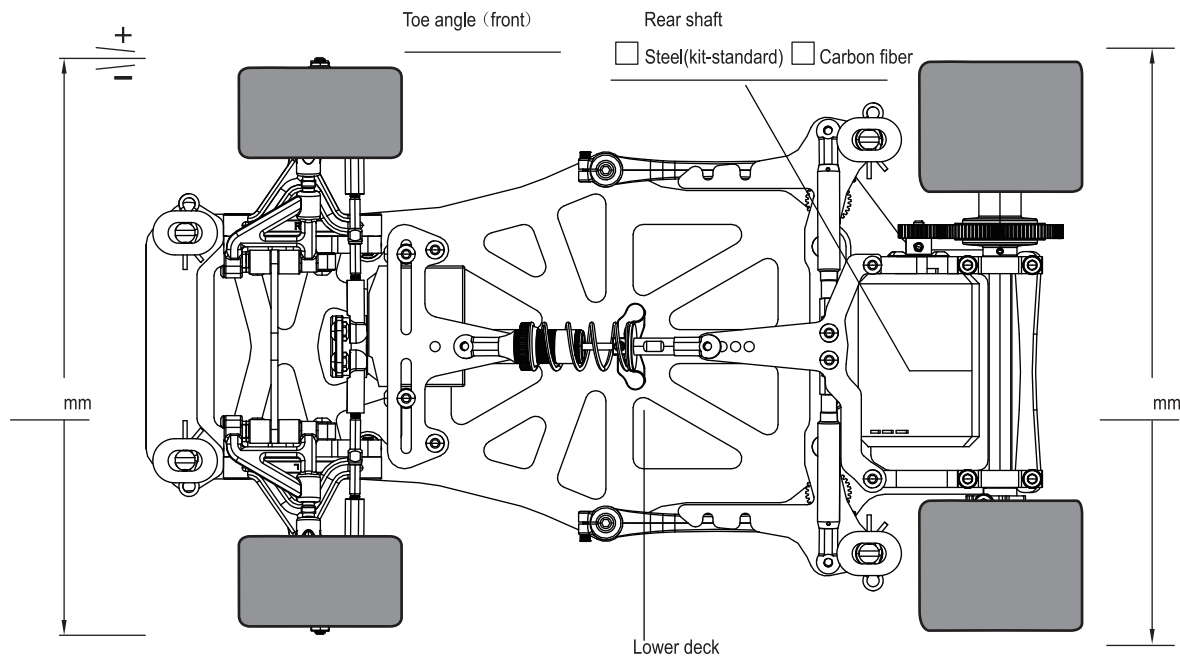

«Front»

- ☐ 0.5mm
- ☐ 1.0mm
- ☐ 2.0mm
- ☐ 5.0mm



Ground clearance _____ mm


«Front spring»

- ☐ Soft(gold)
- ☐ Medium(silver)
- ☐ Hard(black)


Wheel Base

- ☐ Short ☐ Mid ☐ Long


- FR shim RR Shim
- ☐ 1.80° Thick Thin
- ☐ 3.25° Thin Thick
- ☐ 6.15° --- Thick, Thin



- ☐ Hard
- ☐ Hard
- ☐ Medium
- ☐ Soft



«Rear»

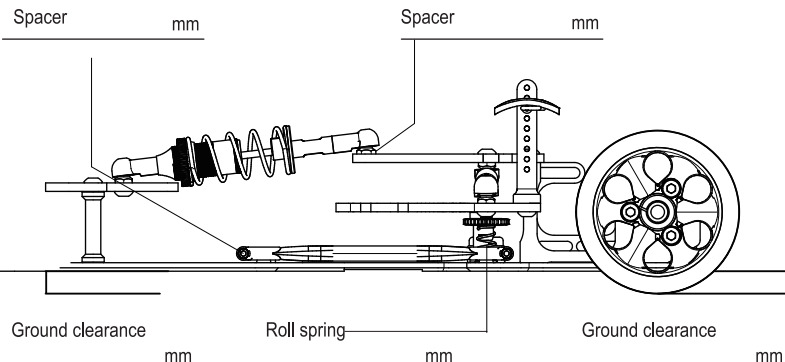


«Rear ground clearance»


- ☐ Soft(gold)
- ☐ Medium(silver)
- ☐ Hard(black)

- ☐ 0.25mm
- ☐ 0.5mm

- ☐ 0.5mm
- ☐ 1.0mm
- ☐ 2.0mm
- ☐ Rear tire width




«Damper»



Coil spring Roll damper

- ☐ Soft(gold)
- ☐ Medium(silver)
- ☐ Hard(black)



Motor _____	Spur gear _____	T _____	Pinion gear _____	T _____
Front wheel _____	Front tire _____		Front tire diameter _____	mm
Rear wheel _____	Rear tire _____		Rear tire diameter _____	mm
Body _____	Front wing _____		Rear wing _____	
Battery _____	Best lap _____			
Memo _____				