


Driver: _____	Airtemp: _____	Size: <input type="checkbox"/> Open <input type="checkbox"/> Med. <input type="checkbox"/> Tight
Date: . . .	Humidity: _____	Traction: <input type="checkbox"/> High <input type="checkbox"/> Med. <input type="checkbox"/> Low
Track: _____	Track temp: _____	Surface: <input type="checkbox"/> Smooth <input type="checkbox"/> Med. <input type="checkbox"/> Bumpy

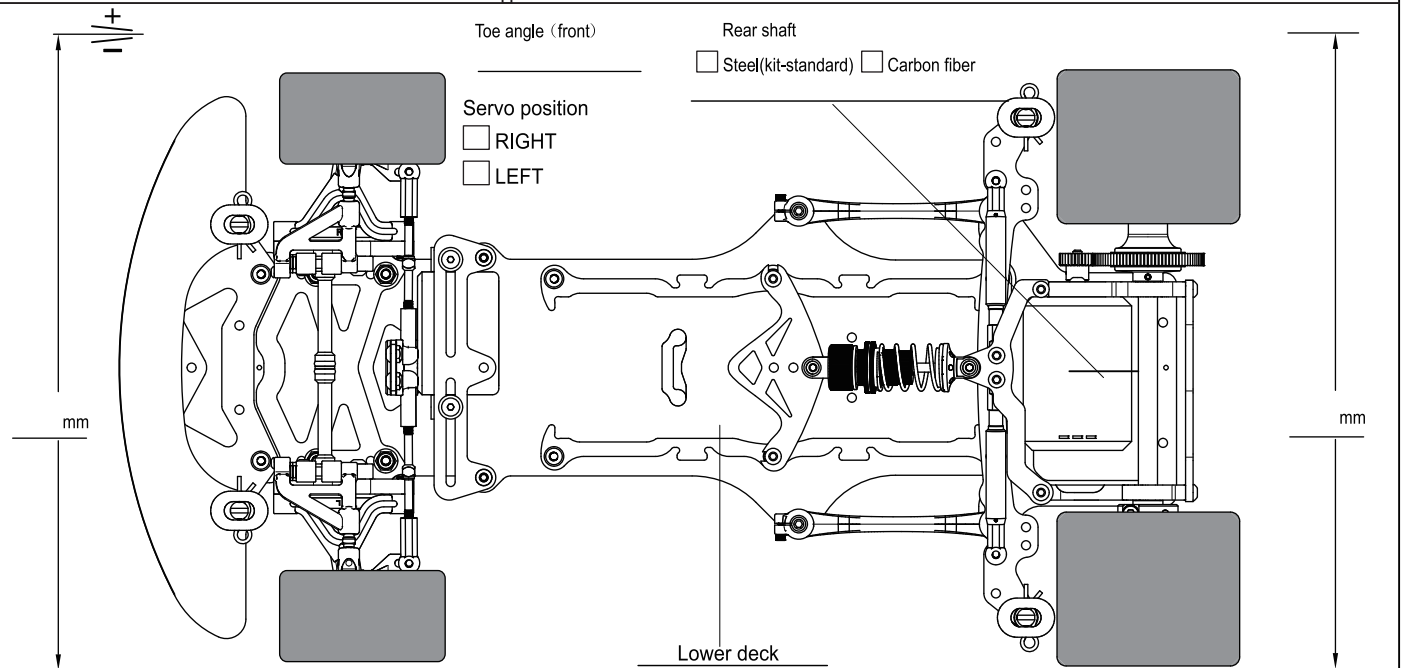

«Front»

Wheel Base
☐ Short ☐ Mid ☐ Long

FR shim RR Shim
☐ 1.80° Thick Thin
☐ 3.25° Thin Thick
☐ 6.15° --- Thick, Thin

Front Shim Rear Shim
☐ 10°
☐ 5°
☐ 0°

Ground clearance _____ mm

«Front spring»

☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

☐ Hard
☐ Medium
☐ Soft

«Rear»

Spacer _____ mm

Spacer _____ mm

Roll spring

Ground clearance _____ mm

Ground clearance _____ mm

Ground clearance _____ mm

«Rear ground clearance»

☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

Hole Position
☐ Top
☐ Bottom

«Damper»

Coil spring Roll damper

☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)

Piston hole(S) _____

Oil # _____

Oil # _____

Motor _____	Spur gear _____ T	Pinion gear _____ T
Front wheel _____	Front tire _____	Front tire diameter _____ mm
Rear wheel _____	Rear tire _____	Rear tire diameter _____ mm
Body _____	Front wing _____	Rear wing _____
Battery _____	Best lap _____	
Memo _____		